

MODEL SED-4

HIGH PERFORMANCE FIXED LOUVER

STANDARD CONSTRUCTION:




- Frame:** .081 Extruded Aluminum, 4.16" Deep
- Blade:** .081 Extruded Aluminum on approximately 2" centers
- Birdscreen:** .75" x .051" Flattened Aluminum in removable frame. Screen is mounted as standard on inside (rear) as looking from exterior of building.
- Finish:** Mill Aluminum (Std.)
- Minimum Size:** 12 x12
- Maximum Single Section:** 120"w x 84"h or 84"w x 120"h
- Note:** Drainable blade louvers should be limited to 10' maximum section widths (no more than 10' between vertical downspouts) to enable the drainable design to function effectively.

OPTIONS:


- Flanged Frame (1.50" std.), (1" std for shapes R_)
- Custom Flange (1", 2", or 3"), (1.5", 2", or 3" for shapes R_)
- Extended Sill
- Glazing Adapter (.50" or .75")
- Insect Screen (Other Screens Available, See Screen Page)
- Filter Racks (no screen)
- Security Bars
- Hinged Sub Frame
- Welded Construction (Wind Load +/- 50 psf)
- Blank-off, Alum., non-insulated, no screen, non-removeable
- Blank-off, Alum., non-insulated, with bird screen or insect screen
- Blank-off, Alum., insulated double wall, with bird screen, removable
- Blank-off, Alum., insulated double wall, no screen, non-removeable

AVAILABLE FINISHES:


- Powder Polyester TGIC** (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2603 Standards
- Powder Super durable polyester** (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2604-05 Standards
- Acrylic baked enamel** (ACRA-BOND® ULTRA) by AkzoNobel baked on at 350°F, 0.8 to 1.2 mils dry Meets AAMA-2603 Standards
- Kynar®** (ALUM*A*STAR®) 2 coats by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry Meets AAMA-2604-05 Standards
- Kynar 500®** or **HYLAR® 5000 70% TRINAR®** (2 coats) by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry, Meets AAMA-2605-05 Standards
- Kynar 500®** or **HYLAR® 5000 (70% Tri-Escent II)** (2 coats) by AkzoNobel, a superior finish to other metallic or anodized finishes. A blend of mica, ceramic, and inorganic pigments creates subtle yet dazzling design that goes beyond metallic color without the requirement of a clear coat. 14 standard colors - custom colors available. Baked on at 415°F, 1.4 to 1.8 mils dry, meets AAMA 2605-05.
- Clear Anodize 204 R-1 Class II** (AA-C22A31)(0.4 to 0.7 mil)
- Clear Anodize 215 R-1 Class I** (AA-C22A41)(>0.7 mil)
- Integral Color Anodize** (AA-C22A42)(>0.7 mil)
 - Clear coat available for all above finishes.
 - Hylar® 5000 is a registered trademark of Solvay Solexis, Inc.
 - Kynar® 500 is a registered trademark of Arkema.
 - ALUM*A*STAR® 50 and TRINAR® are registered trademarks of AkzoNobel
 - ACRA-BOND® ULTRA is a registered trademark of AkzoNobel

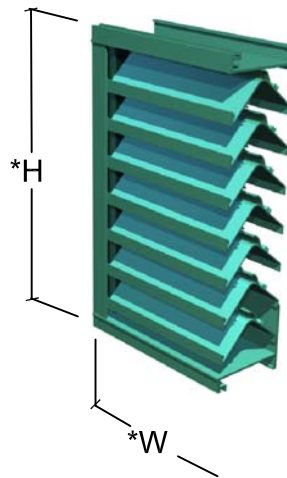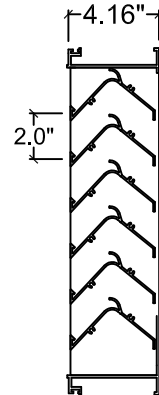

OPTIONAL EXTENDED SILL
(except R_ Shapes, 1" optional std)



OPTIONAL FLANGE



OPTIONAL GLAZING ADAPTER

*Width and Height dimensions are approximately 1/4" under listed size.

Due to continuing research, United Enertech reserves the right to change specifications without notice.





3005 South Hickory Street
Chattanooga, Tennessee 37407
Tel: (423) 698-7715
Fax: (423) 698-6629
www.unitedenertech.com

MODEL SED-4 (Drainable Blade w/ Jamb Gutters & Downspouts)

DRAWN BY: CLJ	DATE: December 2001	REV. DATE: March 2012	REV. NO. 9	APPROVED BY: BGT	DWG. NO.: A-18
------------------	------------------------	--------------------------	---------------	---------------------	--------------------------

Model SED-4 Louver Performance Data

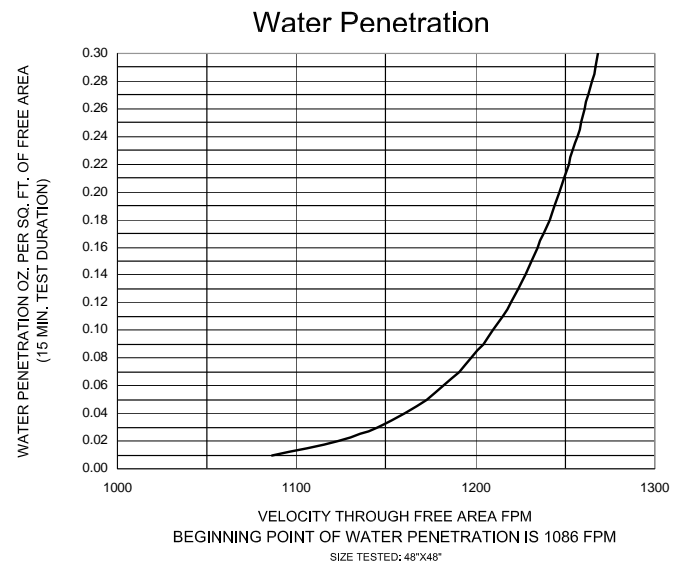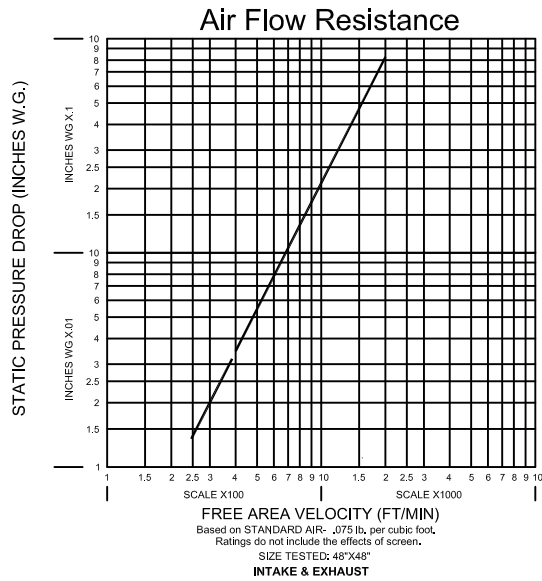

SED-4 FREE AREA IN SQ. FT.

Louver Height Inches	Width - Inches																Louver Height Inches			
	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102		108	114	120
12	0.17	0.28	0.38	0.48	0.59	0.69	0.80	0.90	1.00	1.11	1.21	1.32	1.42	1.52	1.63	1.73	1.84	1.94	2.04	12
18	0.34	0.55	0.76	0.97	1.17	1.38	1.59	1.80	2.01	2.21	2.42	2.63	2.84	3.05	3.25	3.46	3.67	3.88	4.09	18
24	0.51	0.83	1.14	1.45	1.76	2.07	2.39	2.70	3.01	3.32	3.63	3.95	4.26	4.57	4.88	5.19	5.51	5.82	6.13	24
30	0.68	1.10	1.52	1.93	2.35	2.76	3.18	3.60	4.01	4.43	4.84	5.26	5.68	6.09	6.51	6.92	7.34	7.76	8.17	30
36	0.86	1.38	1.90	2.42	2.94	3.46	3.98	4.50	5.02	5.54	6.06	6.58	7.10	7.62	8.14	8.66	9.18	9.70	10.22	36
42	1.03	1.65	2.28	2.90	3.52	4.15	4.77	5.40	6.02	6.64	7.27	7.89	8.52	9.14	9.76	10.39	11.01	11.64	12.26	42
48	1.20	1.93	2.65	3.38	4.11	4.84	5.57	6.29	7.02	7.75	8.48	9.21	9.93	10.66	11.39	12.12	12.85	13.57	14.30	48
54	1.37	2.20	3.03	3.87	4.70	5.53	6.36	7.19	8.03	8.86	9.69	10.52	11.35	12.19	13.02	13.85	14.68	15.51	16.35	54
60	1.54	2.48	3.41	4.35	5.28	6.22	7.16	8.09	9.03	9.96	10.90	11.84	12.77	13.71	14.64	15.58	16.52	17.45	18.39	60
66	1.71	2.75	3.79	4.83	5.87	6.91	7.95	8.99	10.03	11.07	12.11	13.15	14.19	15.23	16.27	17.31	18.35	19.39	20.43	66
72	1.88	3.03	4.17	5.31	6.46	7.60	8.75	9.89	11.03	12.18	13.32	14.47	15.61	16.75	17.90	19.04	20.19	21.33	22.47	72
78	2.05	3.30	4.55	5.80	7.05	8.29	9.54	10.79	12.04	13.29	14.53	15.78	17.03	18.28	19.53	20.77	22.02	23.27	24.52	78
84	2.23	3.58	4.93	6.28	7.63	8.99	10.34	11.69	13.04	14.39	15.75	17.10	18.45	19.80	21.15	22.51	23.86	25.21	26.56	84
90	2.40	3.85	5.31	6.76	8.22	9.68	11.13	12.59	14.04	15.50	16.96	18.41	19.87	21.32	22.78	24.24	25.69	27.15	28.60	90
96	2.57	4.13	5.69	7.25	8.81	10.37	11.93	13.49	15.05	16.61	18.17	19.73	21.29	22.85	24.41	25.97	27.53	29.09	30.65	96
102	2.74	4.40	6.07	7.73	9.39	11.06	12.72	14.39	16.05	17.71	19.38	21.04	22.71	24.37	26.03	27.70	29.36	31.03	32.69	102
108	2.91	4.68	6.45	8.21	9.98	11.75	13.52	15.29	17.05	18.82	20.59	22.36	24.13	25.89	27.66	29.43	31.20	32.97	34.73	108
114	3.08	4.95	6.83	8.70	10.57	12.44	14.31	16.19	18.06	19.93	21.80	23.67	25.55	27.42	29.29	31.16	33.03	34.91	36.78	114
120	3.25	5.23	7.20	9.18	11.16	13.13	15.11	17.08	19.06	21.04	23.01	24.99	26.96	28.94	30.92	32.89	34.87	36.84	38.82	120

Wind Driven Rain Performance -AMCA 500-L-

Test size 1m x 1m (39"x39") core
41 1/2" w x 41" h Nominal (1.05m x 1.04m)

75 mm/h (3 in/h) Rainfall & 13 m/s (29 mph) Wind Velocity				
Core Velocity fpm (m/s)	Airflow cfm (m³/s)	Free Area Velocity fpm (m/s)	Effectiveness Ratio	AMCA Effectiveness Class
0 (0.0)	0 (0.00)	0 (0.0)	99.5	A
137 (0.7)	1475 (0.70)	265 (1.3)	99.0	A
193 (1.0)	2077 (0.98)	373 (1.9)	98.3	B
281 (1.4)	3025 (1.43)	543 (2.8)	98.2	B
381 (1.9)	4101 (1.94)	736 (3.7)	98.1	B
471 (2.4)	5070 (2.39)	910 (4.6)	97.6	B
584 (3.0)	6286 (2.97)	1129 (5.7)	96.5	B
679 (3.4)	7309 (3.45)	1312 (6.7)	95.4	B

202.4 mm/h (8 in/h) Rainfall & 22 m/s (50 mph) Wind Velocity				
Core Velocity fpm (m/s)	Airflow cfm (m³/s)	Free Area Velocity fpm (m/s)	Effectiveness Ratio	AMCA Effectiveness Class
0 (0.0)	0 (0.00)	0 (0.0)	98.7	B
120 (0.6)	1292 (0.61)	232 (1.2)	98.0	B
175 (0.9)	1884 (0.89)	338 (1.7)	97.5	B
284 (1.4)	3057 (1.44)	549 (2.8)	97.0	B
406 (2.1)	4370 (2.06)	785 (4.0)	96.2	B
497 (2.5)	5350 (2.52)	960 (4.9)	95.5	B
578 (2.9)	6222 (2.94)	1117 (5.7)	95.2	B
683 (3.5)	7352 (3.47)	1320 (6.7)	93.1	C

Class	Discharge Loss Coefficient
1	0.4 and above
2	0.3 to 0.399
3	0.2 to 0.299
4	.0199 and below

* Discharge Loss Intake	
Wind Velocity (mph)	Class
29	3
50	3

(the higher the coefficient, the less resistance to airflow.)

* Discharge loss coefficient is the theoretical air flow of an opening divided by the actual flow rate of a louver the same size.

SED-4 Specifications

Furnish and install louver as hereinafter specified where shown on plans or as described in schedules. Louver shall be stationary type with horizontal rain resistant style blades positioned on approximately 2" centers within 4.162" deep frame. Louver frame and blade materials to be .081" thick 6063-T5 extruded aluminum. Sections up to maximum of 60"w x 96"h shall withstand wind loading of 30 lbs/sq.ft. (110 mph wind equivalent). Consult factory for welded construction and higher wind speeds. Louver shall meet the performance requirements established by the AMCA 500L test procedure and shall be licensed to bear the AMCA certified rating seal for water penetration, air performance, and wind driven rain. Louver shall have a minimum free area of 5.57 sq. ft. based on the standard 48"w x 48"h test specimen. Louver shall have a maximum static pressure drop of .20"(exhaust) & .20"(intake) water gage based on 1000 FPM free area intake velocity. Louver shall carry a minimum Class B water penetration classification based on a ventilation core of 679 FPM at a rainfall rate of 3" per hour and a 29 mph simulated wind velocity. Louver shall also carry a minimum class B water penetration classification based on a ventilation core velocity of 578 FPM at a rainfall rate of 8" per hour and a 50 mph simulated wind velocity.

Wind Driven Rain Penetration Classes	
Class	Effectiveness
A	1 to 0.99
B	0.989 to 0.95
C	0.949 to 0.80
D	Below 0.8



United Enertech certifies that the SED-4 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA certified rating seal applies to water penetration, air performance, and wind driven rain ratings.