
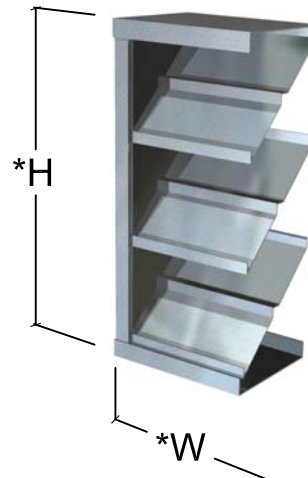


**MODEL SAFL-D-6**

**6" ADJUSTABLE/DRAINABLE STEEL LOUVER**

**STANDARD CONSTRUCTION:**

- FRAME: 18 ga. galvanized steel, 6.13" deep
- BLADES: Drainable style, 18 ga. galvanized steel, positioned at 45° angles on approximately 5.88" centers.
- BIRDSCREEN: .50" x .050" Expanded flattened alum. in removable frame.  
Screen is mounted on inside (rear)
- OPERATORS: Louvers without actuators will be supplied with Locking Quadrants.
- FINISH: Mill Galvanized
- MINIMUM SIZE: 8"w x 12"h
- MAXIMUM SIZE: 48"w x 72"h  
Larger sizes made in multiple sections.

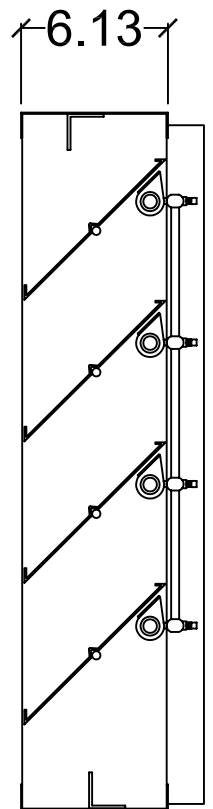


**OPTIONS:**

- Flanged Frame (1.5" std.)
- Custom Flange (1", 2" , or 3")
- Filter Racks (no screen)
- Hinged Sub Frame
- Welded Construction
- Insect Screen (Other Screens Available, See Screen Page)
- Actuator: See Actuator Selection Chart
- Aluminum Construction
- 304 Stainless Steel Construction
- 316 Stainless Steel Construction
- Blade Seals
- Jamb Seals
- Extended Sill
- Security Bars

**AVAILABLE FINISHES:**

- Powder Polyester TGIC (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2603 Standards
- Powder Super durable polyester (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2604-05 Standards
- Acrylic baked enamel (ACRA-BOND® ULTRA) by AkzoNobel baked on at 350°F, 0.8 to 1.2 mils dry Meets AAMA-2603 Standards
- Kynar® (ALUM\*A\*STAR®) 2 coats by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry Meets AAMA-2604-05 Standards
- Kynar 500® or HYLAR® 5000 70% TRINAR® (2 coats) by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry, Meets AAMA-2605-05 Standards
- Kynar 500® or HYLAR® 5000 (70% Tri-Escent II) (2 coats) by AkzoNobel, a superior finish to other metallic or anodized finishes. A blend of mica, ceramic, and inorganic pigments creates subtle yet dazzling design that goes beyond metallic color without the requirement of a clear coat. 14 standard colors - custom colors available. Baked on at 415°F, 1.4 to 1.8 mils dry, meets AAMA 2605-05.
- Clear Anodize 204 R-1 Class II (AA-C22A31)(0.4 to 0.7 mil)
- Clear Anodize 215 R-1 Class I (AA-C22A41)(>0.7 mil)
- Integral Color Anodize (AA-C22A42)(>0.7 mil)
  - Clear coat available for all above finishes.
  - Hylar® 5000 is a registered trademark of Solvay Solexis, Inc.
  - Kynar® 500 is a registered trademark of Arkema.
  - ALUM\*A\*STAR® 50 and TRINAR® are registered trademarks of AkzoNobel
  - ACRA-BOND® ULTRA is a registered trademark of AkzoNobel

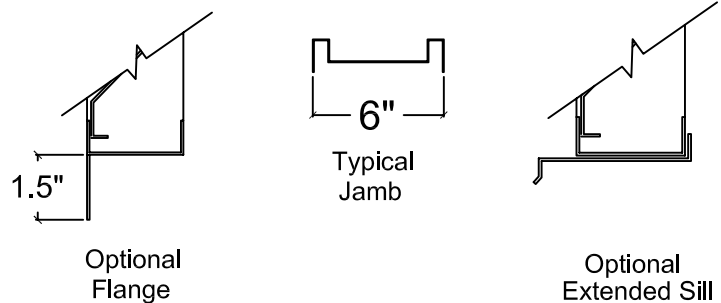

\*W & H dimensions furnished approximately 1/4" under size.

Due to continuing research, United Enertech reserves the right to change specifications without notice.

		3005 South Hickory Street Chattanooga, Tennessee 37407 Tel: (423) 698-7715 Fax: (423) 698-6629 www.unitedenertech.com			
		<b>MODEL SAFL-D-6 (6" ADJUSTABLE/DRAINABLE STEEL LOUVER)</b>			
DRAWN BY:	DATE:	REV. DATE:	REV. NO.	APPROVED BY:	DWG. NO.:
MHM	4-20-10	9-13-10	2	BGT	A-30