

MODEL AXF-12

12" ACOUSTICAL LOUVER

STANDARD CONSTRUCTION:

- Frame:** 12" Deep x 18 gauge galvanized steel
- Blade (air side):** 18 gauge galvanized steel
- Blade (noise side):** 20 gauge galvanized perforated steel
- Sound Absorber:** Advanced Microfibers composed of Polyester and Polyolefin
- Screen:** .75" x .051" flattened aluminum screen mounted in removable frames.
- Minimum Louver Size:** 12"w x 24"h
- Maximum Louver Size:** 48"w x 120"h


Louvers more than 48"w are built in mult. sections

OPTIONS:

- Screen mounted: Exterior Side
- Flanged Frame (1.5" std.)
- Custom Flange (1", 2" , or 3")
- Extended Sill
- Insect Screen (Other Screens Available, See Screen Page)
- Filter Racks (no screen)
- Security Bars
- Hinged Sub Frame
- Welded Construction
- Blank-off, Steel, non-insulated, no screen, non-removeable
- Blank-off, Steel, non-insulated, with bird screen or insect screen
- Blank-off, Steel, insulated double wall, with bird screen, removable
- Blank-off, Steel, insulated double wall, no screen, non-removeable
- Aluminum Construction
- 304 Stainless Steel Const. 316 Stainless Steel Const.



AVAILABLE FINISHES:

- Powder Polyester TGIC** (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2603 Standards
- Powder Super durable polyester** (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2604-05 Standards
- Acrylic baked enamel** (ACRA-BOND® ULTRA) by AkzoNobel baked on at 350°F, 0.8 to 1.2 mils dry Meets AAMA-2603 Standards
- Kynar®** (ALUM*A*STAR®) 2 coats by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry Meets AAMA-2605-05 Standards
- Kynar 500®** or **HYLAR® 5000** 70% **TRINAR®** (2 coats) by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry, Meets AAMA-2605-05 Standards
- Kynar 500®** or **HYLAR® 5000** (70% Tri-Escent II) (2 coats) by AkzoNobel, a superior finish to other metallic or anodized finishes. A blend of mica, ceramic, and inorganic pigments creates subtle yet dazzling design that goes beyond metallic color without the requirement of a clear coat. 14 standard colors - custom colors available. Baked on at 415°F, 1.4 to 1.8 mils dry, meets AAMA 2605-05.
- Clear Anodize** 204 R-1 Class II (AA-C22A31)(0.4 to 0.7 mil)
- Clear Anodize** 215 R-1 Class I (AA-C22A41)(>0.7 mil)
- Integral Color Anodize** (AA-C22A42)(>0.7 mil)
 - Clear coat available for all above finishes.
 - Hylar® 5000 is a registered trademark of Solvay Solexis, Inc.
 - Kynar® 500 is a registered trademark of Arkema.
 - ALUM*A*STAR® 50 and TRINAR® are registered trademarks of AkzoNobel
 - ACRA-BOND® ULTRA is a registered trademark of AkzoNobel

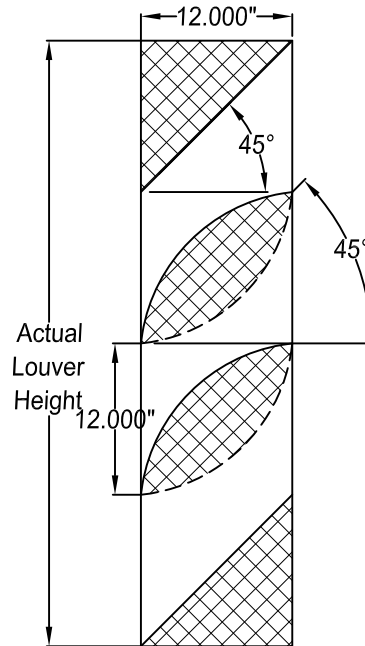

Model AXF-12

FREE AREA:
40% (based on size 48 x 48)



Model AXF-12

Acoustical Performance Certified data by Riverband Acoustical Laboratories

Selected 1/3 Octave Band Center Frequency HZ	125	250	500	1000	2000	4000
Transmission Loss in Decibels	6	5	8	11	10	8
Free Field Noise Reduction	12	11	14	17	16	14
						STC = 9

*Width and Height dimensions are approximately 1/4" under listed size.

Due to continuing research, United Enertech reserves the right to change specifications without notice.



3005 South Hickory Street
Chattanooga, Tennessee 37407
Tel: (423) 698-7715
Fax: (423) 698-6629
www.unitedenertech.com

MODEL AXF-12 (12" ACOUSTICAL LOUVER)

DRAWN BY: MHM	DATE: 4-21-10	REV. DATE: 5-20-10	REV. NO. 1	APPROVED BY: BGT	DWG. NO.: A-36
------------------	------------------	-----------------------	---------------	---------------------	--------------------------