

MODEL FD-AUSL
ULTRA SLIMLINE CURTAIN FIRE DAMPER
U.L. 555 CLASSIFIED 1-1/2 AND 3 HOURS
FOR USE IN STATIC SYSTEMS

Base UL Model: **FD-USL**




Application and Design

The Model FD-AUSL is UL Classified for installation in walls, and partitions with a fire rating of less than 3 hours. This damper may be installed vertically in static HVAC systems that automatically shut down in the event of fire. (See optional 3 hr rating)

Standard Construction

- Frame:** Roll formed Frame - Galvanized Steel
- Blades:** Low Profile Roll Formed - Galvanized Steel
- Fusible Link - UL-33:** UL Listed 165°F (Standard), 212°F (Optional)

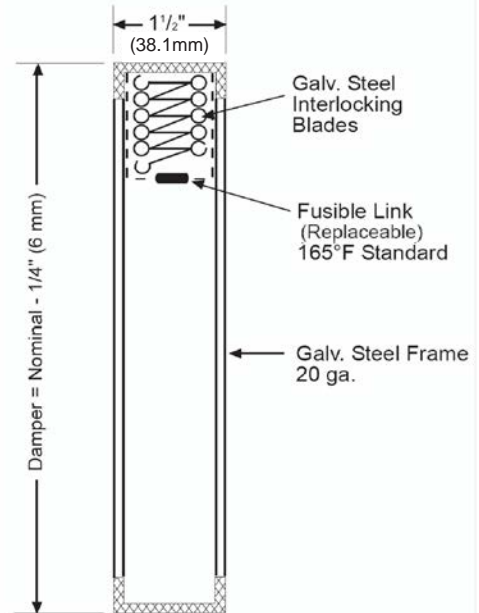

Model FD-AUSL meets or complies with the following as a fire damper:
All major building codes, including IBC/ICC International Code
UL 555 Listing 1-1/2 and 3 Hour - File #R25410
ULC S112
NFPA - 90A, 80

Note: Dampers are furnished Approx. 1/4" undersized as given duct dimensions, unless otherwise noted.

Standard Sizes (duct) 1-1/2 & 3 Hour	
Min. V	Max. Vertical Size
4" X 4" 102mm X 102mm	40"W X 40"H 1016mm X 1016mm

- Options:**
- Factory Sleeve: _____ Ga, (20 Ga min.)
Sleeve Length: _____
 - Retaining Angles
 - One Side _____
 - Both Sides _____
 - 3 Hour Rating

Note: Due to continuing research, UE reserves the right to change specifications without notice.

Job Name: Location: Architect: Engineer: Contractor:	<input type="checkbox"/> MODEL FD-AUSL (Ultra Slimline)						
	<table border="1" style="width: 100%;"> <tr> <td style="width: 33%;">DRAWN BY: MAB</td> <td style="width: 33%;">DATE: 10-25-07</td> <td style="width: 33%;">REV. DATE: 02-10-10</td> </tr> <tr> <td>REV. NO.: 5</td> <td>APPROVED BY: SDC</td> <td>DWG. NO.: A-15</td> </tr> </table>	DRAWN BY: MAB	DATE: 10-25-07	REV. DATE: 02-10-10	REV. NO.: 5	APPROVED BY: SDC	DWG. NO.: A-15
DRAWN BY: MAB	DATE: 10-25-07	REV. DATE: 02-10-10					
REV. NO.: 5	APPROVED BY: SDC	DWG. NO.: A-15					