



Suggested Specifications:

Furnish and install for exhaust applications where air movement is needed to control condensation and reduce stagnant air.

Standard Features:

- Direct drive
- Includes sleeve and backdraft damper
- Totally enclosed motor (TEAO)

Fan Size	Model	H.P.	Fan RPM	Volts	Run Amps	CFM @ 0.0 Static Pressure
12"	DD-1210	1/6	1625	115	2.2	1580
16"	DD-1611	1/4	1650	115	2.3	2600
20"	DD-2011	1/4	1650	115	2.3	3200
24"	DD-2413	1/2	1100	115	6.1	5460

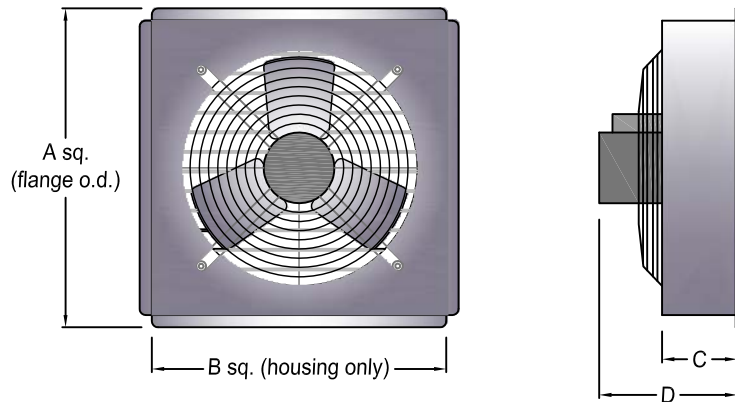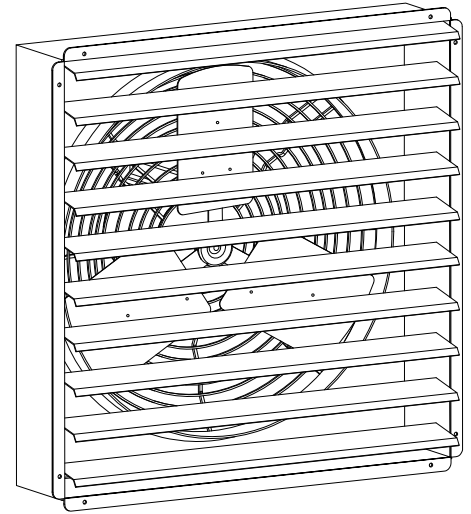

Housing Dimensions					
Model	A sq.	B sq.	C	D	Weight
DD-1210	18-3/4	17	6	12-1/2	35 lbs.
DD-1611	22-3/4	21	6	13-3/4	43 lbs.
DD-2011	26-3/4	25	6	14-1/2	55 lbs.
DD-2413	30-3/4	29	6	15-1/2	66 lbs.

QTY.	MODEL	TAG	ACCESSORIES

Project:	<input type="checkbox"/> Model DD series		
Architect:	DRAWN BY: CLJ	DATE: 9-5-07	REV. DATE:
Engineer:	REV. NO.	APPROVED BY: BGT	DWG. NO.: L-1
Contractor:			