



MODEL MI-A



1/8" undersized

MODEL OB-A

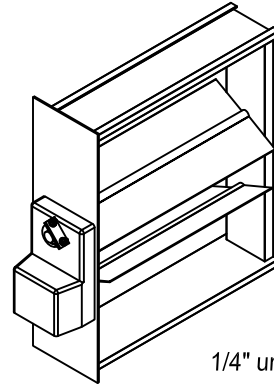

1/4" undersized

STANDARD FEATURES:

ROUND

- Body: 24 ga. galvanized (for dia. 4" - 10")
 20 ga. galvanized (for dia. 12" - 20")
- Blades: Double skin 24 ga. galvanized steel w/
 gasket
- Body Length 8"
 Minimum Position Stop in Actuator
- Bronze oilite bearings

OPTIONS:

- Aluminum Construction
- Stainless Steel Construction
- Powder Coated

Maximum Velocity	
Diameter	FPM
4" - 8"	2600
10" - 12"	2400
14" - 18"	2300
20"	2100

STANDARD FEATURES:

RECTANGULAR

- .081 extruded aluminum frame and blade
- Minimum Position Stop in Actuator
- Bronze oilite bearings

OPTIONS:

- Blade Seals
- Jamb Seals
- Stainless Steel Construction (epoxy coated linkage)
- Powder Coated

Maximum Velocity	
WIDTH	FPM
12"	2600
16"	2400
24"	2200
30"	2000

Actuator - United Enertech
 (Spring Return)

115 VAC
 5.5 Watts Running
 3.5 Watts Holding

24 VAC
 5 Watts Running
 2.5 Watts Holding

Job Name:	<input type="checkbox"/> Model MI-A <input type="checkbox"/> Model OB-A
Location:	
Architect:	
Engineer:	
Contractor:	

DRAWN BY: CLJ	DATE: 12-4-03	REV. DATE: 11-8-10
REV. NO. 10	APPROVED BY: BGT	DWG. NO.: G-1