



**MODEL MI-A**



1/8" undersized

**MODEL OB-A**

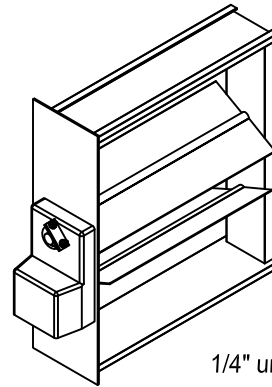

1/4" undersized

**STANDARD FEATURES:**

**ROUND**

- Body: 24 ga. galvanized (for dia. 4" - 10")  
20 ga. galvanized (for dia. 12" - 20")
- Blades: Double skin 24 ga. galvanized steel w/ gasket
- Body Length 8"  
Minimum Position Stop in Actuator
- Bronze oilite bearings

**OPTIONS:**

- Aluminum Construction
- Stainless Steel Construction
- Powder Coated

Maximum Velocity	
Diameter	FPM
4" - 8"	2600
10" - 12"	2400
14" - 18"	2300
20"	2100

**STANDARD FEATURES:**

**RECTANGULAR**

- .081 extruded aluminum frame and blade
- Minimum Position Stop in Actuator
- Bronze oilite bearings

**OPTIONS:**

- Blade Seals
- Jamb Seals
- Stainless Steel Construction (epoxy coated linkage)
- Powder Coated

Maximum Velocity	
WIDTH	FPM
12"	2600
16"	2400
24"	2200
30"	2000

Actuator - United Enertech  
 (Spring Return)

**115 VAC**  
 5.5 Watts Running  
 3.5 Watts Holding

**24 VAC**  
 5 Watts Running  
 2.5 Watts Holding

Job Name:	<input checked="" type="checkbox"/> <b>Model MI-A</b> <input type="checkbox"/> <b>Model OB-A</b>		
Location:			
Architect:			
Engineer:			
Contractor:			
	DRAWN BY: CLJ	DATE: 12-4-03	REV. DATE: 11-8-10
	REV. NO. 10	APPROVED BY: BGT	DWG. NO.: <b>G-1</b>