


The MZ systems are simple, stand alone, single systems that work independently of the HVAC unit to maintain temperature setpoint.



1/8" undersized


**MODEL MI-MZ-1 or 2 shown**

**MZ-1 (single zone control)**

Consist of wall T'stat, mounted air stream change over sensor, Actuator/Controller, and 120/24 Transformer


**MZ-2 (single zone control with reheat)**

Consist of wall T'stat, mounted air stream change over sensor, connection for Electric Heat or Hot Water Coil, Actuator/Controller, and 120/24 Transformer

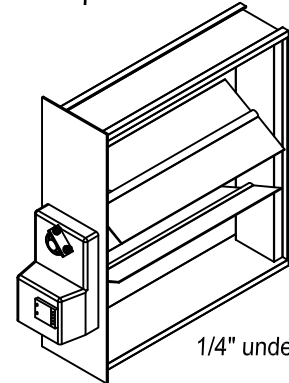

1/4" undersized

**MODEL OB-MZ-1 or 2 shown**



**MI FEATURES:**

- Body: 24 ga. galvanized (for dia. 4" - 10")  
20 ga. galvanized (for dia. 12" - 20")
- Blades: Double skin 24 ga. galvanized steel w/gasket
- Body Length 8"
- Bronze oilite bearings

**OPTIONS:**

- Aluminum Construction
- Stainless Steel Construction

**OB FEATURES:**

- .081 extruded aluminum frame and blade

**OPTIONS:**

- Blade Seals
- Jamb Seals
- Stainless Steel Construction (epoxy coated linkage)

**WALL T'STAT FEATURES:**

- 24 VAC
- 68°-76° F setpoint range (Factory Adjustable stop points)
- Auto changeover
- 3 1/2"x3" overall size
- Proportional plus integral PI Control Algorithm
- Control up to 3 dampers +/- 1° F Precision
- Easy Wiring

Job Name:	<input type="checkbox"/> <b>Model MI-MZ-1</b> <input type="checkbox"/> <b>Model MI-MZ-2</b>		
Location:	<input type="checkbox"/> <b>Model OB-MZ-1</b> <input type="checkbox"/> <b>Model OB-MZ-2</b>		
Architect:	DRAWN BY:	DATE:	REV. DATE:
Engineer:	CLJ	02-09-02	11-8-10
Contractor:	REV. NO.	APPROVED BY:	DWG. NO.:
	13	BGT	<b>G-5</b>