

Suggested Specifications:


Furnish & install United Enertech Security Barriers at all wall, floor or roof penetrations as designated by designers. Barriers to be C1018 Cold Rolled Steel 1/2" [12.7mm] bars on 6" [152.4mm] centers horizontally and vertically with a 2" [50.8mm] wide, 1/4" [6.35mm] thick steel band frame. Bars to be welded to band frame at all intersections. Standard finish is primer gray. Fasteners by others.

Standard Construction:

- C1018 Cold Rolled Steel
- 1/2" [12.7mm] bars on 6" [152.4mm] centers both ways
- Bars welded at all intersections.
- 2" [50.8mm] wide 1/4" [6.35mm] thick steel band frame
- Powder coated - Gray

Options:

- 3/4" [19.05mm] Bars
- 1" [25.4mm] Bars
- 2" x 2" x 1/4" [50.8 x 50.8 x 6.35mm] angle frame
- 10 ga. Steel Screen
- Crystal White - baked powder polyester
- Bars () on center both ways
- Curb mounted
- No band frame - imbedded style

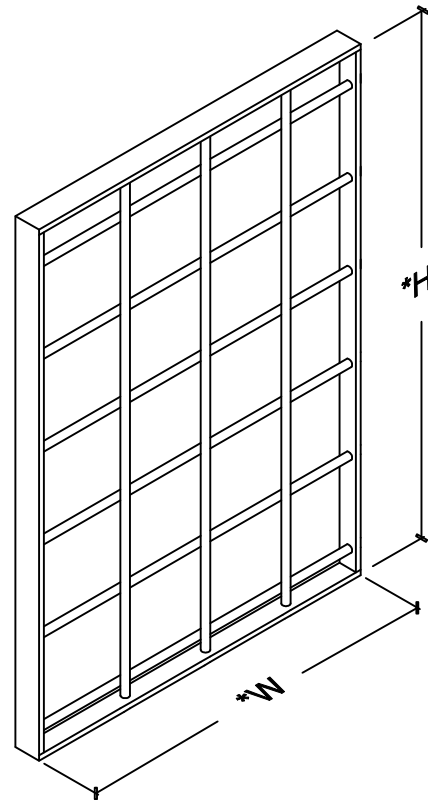

*Width & Height Dimensions approx.
 1/4" [6.35mm] under listed size

Due to continuing research United Enertech reserves the right to change specifications without notice.

Job Name:	<input type="checkbox"/> MODEL BB		
Location:			
Architect:			
Engineer:	DRAWN BY: MHM	DATE: 11-1-06	REV. DATE: 12-23-15
Contractor:	REV. NO. 9	APPROVED BY: BGT	DWG. NO.: K-1