

Suggested Specifications:


Furnish and install for intake or exhaust applications where a quiet, economical, commercial grade fan is needed.

Standard Features:

- Belt driven
- Powder coated finish
- Belt tensioner 24" - 48-5
 (larger than 1-1/2" h.p. motors have standard stationary motor and bearing mounts)
- (ODP) 60 hz motor
- 1750 RPM motor
- Exhaust

Options:

- Add "I" if intake fan required (motorized BDD required) - example: EI-48-7
- BDD (backdraft damper)
- Motor side guard (MEG)
- Weather hood (WH)
- Discharge guard (DEG)

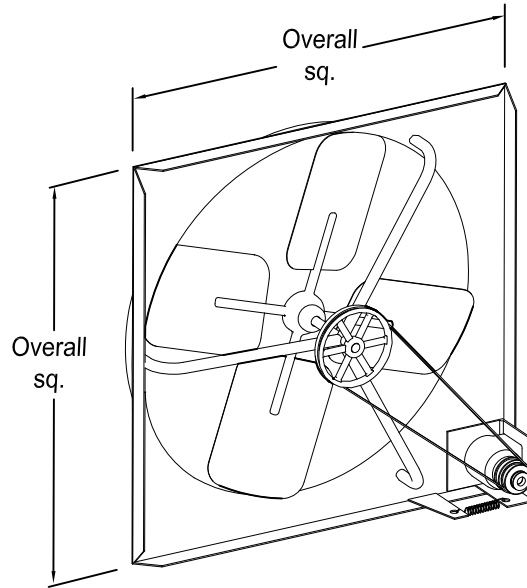

Fan Size	Model	Overall Sq. Size	H.P.	Fan RPM	Volts	Run Amps	CFM vs. Static Pressure		*Sones
							0.000	0.125	
24"	LB-24-1	30"	1/3	550	115	6.5	3,900	3,790	11
30"	LB-30-1	34"	1/3	525	115	6.5	6,300	6,120	11
30"	LB-30-2	34"	1/2	605	115	11	9,500	9,402	14
36"	LB-36-2	40"	1/2	520	115	11	10,900	10,200	12
42"	LB-42-2	46"	1/2	500	115	11	14,300	13,605	12
48"	LB-48-2	52"	1/2	365	115	11	17,100	16,005	8
48"	LB-48-3	52"	3/4	410	115/230	13/16.5	18,200	17,100	10

*The sound ratings shown are loudness values in fan sones at 5 ft. (1.5m) in a hemispherical free field calculated per AMCA standard 301

QTY.	MODEL	TAG	ACCESSORIES

Project:	<input type="checkbox"/> Model LB series		
Architect:	DRAWN BY: CLJ	DATE: 8-16-07	REV. DATE: 9-6-07
Engineer:	REV. NO. 3	APPROVED BY: BGT	DWG. NO.: L-2
Contractor:			