


SPECIFICATIONS:

The Model FL-R has been developed in response to contractors requiring a multi-point flo-cross to retrofit and control air in existing systems.

DIAMETER	CFM	LENGTH	BODY GAUGE
4	45-200	8"	24 ga.
5	65-350	8"	24 ga.
6	80-450	8"	24 ga.
7	105-650	8"	24 ga.
8	145-800	8"	24 ga.
9	175-1050	8"	24 ga.
10	230-1350	8"	24 ga.
12	325-2100	8"	20 ga.
14	450-3200	8"	20 ga.
16	580-4000	8"	20 ga.

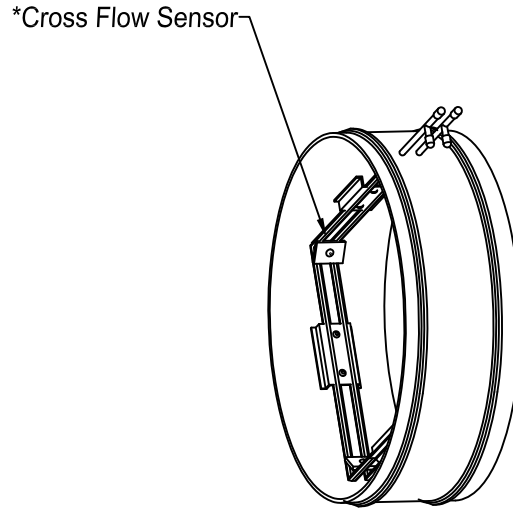

MODEL FL-R

approx. 1/8" o.d. undersized

*Cross Flow Sensor - Aluminum Construction

Job Name:

Location:

Architect:

Engineer:

Contractor:

MODEL FL-R

DRAWN BY:

CLJ

DATE:

8-26-96

REV. DATE:

10-20-14

REV. NO.

5

APPROVED BY:

BGT

DWG. NO.:

L-5