


TERMINAL UNITS / BYPASS

The Model ESMB room bypass terminals varies the volume of air supplied to the room by diverting 0 to 100% of the air through a bypass opening and into the system return. While the room air supply varies, the supply fan operates at a constant volume.

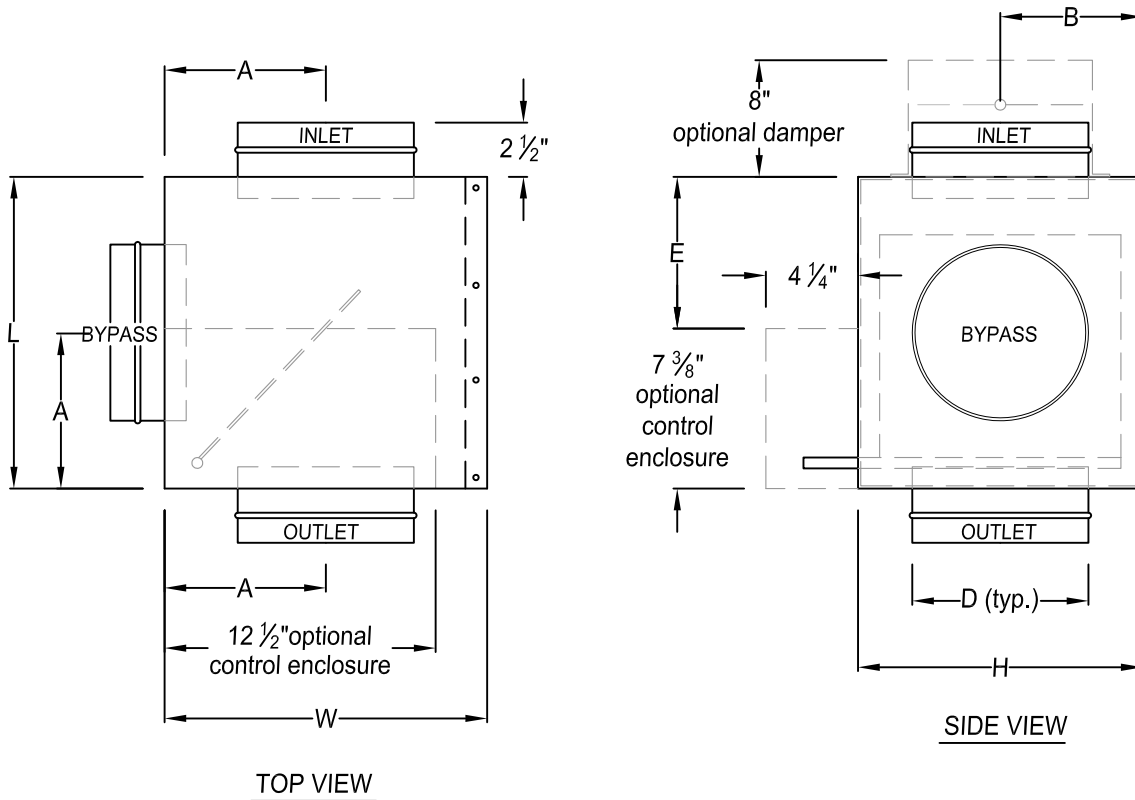

SIZE	A	B	D	E	H	L	W
6	7-1/8"	5-5/8"	5-7/8"	5-1/4"	11-1/8"	12-3/8"	12-7/8"
8	7-1/8"	5-5/8"	7-7/8"	5-1/4"	11-1/8"	12-3/8"	12-7/8"
10	8-1/8"	6-5/8"	9-7/8"	7-1/4"	13-1/8"	14-3/8"	14-7/8"
12	10-1/8"	8-5/8"	11-7/8"	11-1/4"	17-1/8"	18-3/8"	18-7/8"
14	10-1/8"	8-5/8"	13"	11-1/4"	17-1/8"	18-3/8"	18-7/8"
16	12-1/8"	10-5/8"	15-7/8"	15-1/4"	21-1/8"	22-3/8"	22-7/8"
18	12-1/8"	10-5/8"	17-7/8"	15-1/4"	21-1/8"	22-3/8"	22-7/8"

Standard Features:

- 22 ga. galvanized steel construction
- 1/2" Dual density insulation

Options:

- 3/8" Fiber free insulation
- Controls
- Manual Balancing Outlet Dampers

Job Name:	<input type="checkbox"/> MODEL ESMB		
Location:			
Architect:	DRAWN BY:	DATE:	REV. DATE:
Engineer:	CLJ	3-10-08	12-22-10
Contractor:	REV. NO.	APPROVED BY:	DWG. NO.:
	7		L-6