




Metal Building Roof Curb

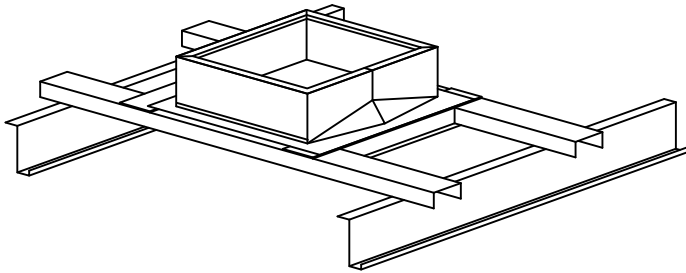


- 1) Place supports on purlins.
 Attach upper & lower end supports to side support. Do not attach side supports to building structure.
- 2) Set curb in place.

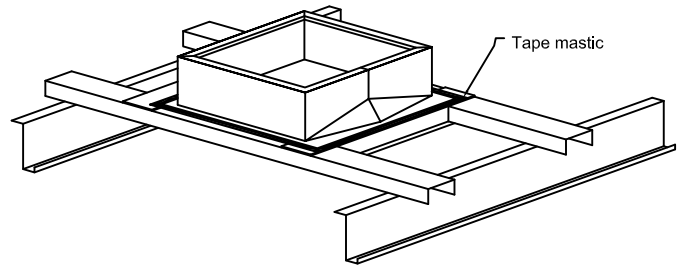

- 3) Apply tape mastic around the outside of curb flange.

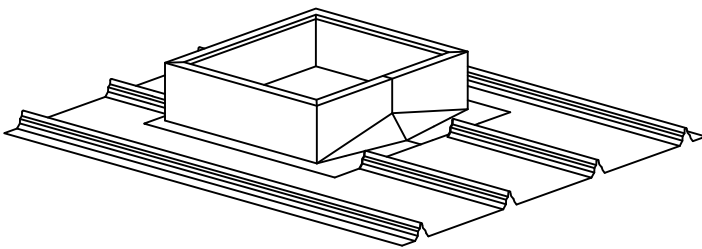

- 4) Make panel cut-out to curb O.D. +6" on uphill side.
- 5) Set roof panels in place.

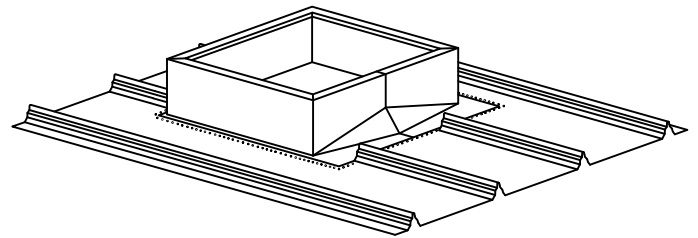

- 6) Attach roof panel to curb with screws spaced no more than 4" o.c.
- 7) Apply tube caulk to full panel cut out.

Job Name:

Location:

Architect:

Engineer:

Contractor:

MODEL UMB-3 (under roof)

DRAWN BY:
 CLJ/SRB

DATE:
 7-14-06

REV. DATE:
 1-4-11

REV. NO.
 4

APPROVED BY:
 BGT

DWG. NO.:
M-26