

Model UMES-3
Metal Building Equipment Support

Standard Construction

- 18 Ga Galvalume Steel shell, base plate and counterflashing
- Welded Mitered Corners
- Factory Installed P.T. Wood Nailer (Nominal 2x4 std.)
- Counterflashing attached with Tek screws and Neoprene washers
- Internal reinforcement at 12" centers with full-depth C-Channel bulkheads
- All Welded Construction
- Pitched to match roof slope
- 8" minimum height

Construction Notes:



Pitched longways (parallel with ribs)
 There are no rib configurations on these rails.
 For rails with rib configurations, consult factory.

Optional Construction

- Heavier Ga. Steel
- Aluminum Construction
- Stainless Steel
- Ridge Mount
- Extended Height
- Extended Mounting Flanges
- Baked Powder Coating- 3 Types
 - (premium polyester)
 - (super durable polyester)
 - (fluoropolymer 70%)
- Wood Nailer
 - Nominal 2x6
 - Nominal 2x8
 - Nominal 2x10
 - Nominal 2x12

Check All That Apply

Due to continuing research, United Energetech reserves the right to change specifications without notice.

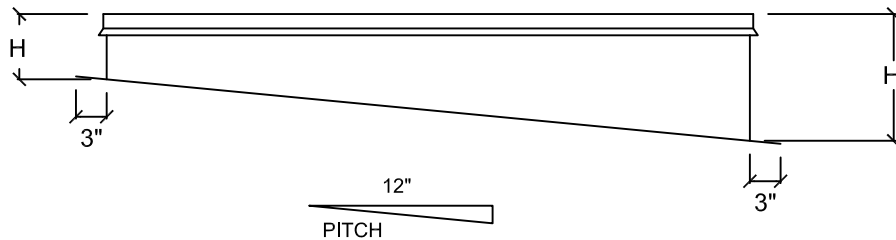

Model UMES-3

Qty.	UMES Style	Length	Width	H	H'	TAG

Job Name:	<input type="checkbox"/> UMES-3		
Location:			
Architect:	DRAWN BY: CLJ	DATE: 12-4-03	REV. DATE: 1-19-11
Engineer:	REV. NO. 5	APPROVED BY: BGT	DWG. NO.: M-9
Contractor:			