

**SERIES: DIAMOND-TEX SCREEN**

**STANDARD CONSTRUCTION:**

(Available with or without perimeter frame)

**Depth (without frame):** 1/4" To 3/8" Extruded Aluminum

**Depth (with tube frame, 1/8" wall):** 2" to 6" Extruded Aluminum

**FINISH:** Mill Aluminum (Std.)

**SINGLE SECTION SIZE LIMITATIONS:**

Height - 10" Minimum To 120" Maximum

Width - 10" Minimum To 120" Maximum

Depth - 3/8" Minimum To 6" Maximum

\* NOTE: BOTH DIMENSION CANNOT EXCEED 84"

**OPTIONS:**


- .75 x .051 Flattened Alum. Birdscreen
- 18-16 Mesh .011 AL. Insect Screen
- Bar Perimeter Frame
- Channel Perimeter Frame
- Tube Perimeter Frame

**INSTALLATION OPTIONS:**



- Holes in outer frame
- Clip angles
- None
- Other \_\_\_\_\_

**OPTIONAL FINISHES:**

- Powder Polyester TGIC** (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2603 Standards
  - Powder Super durable polyester** (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2604-05 Standards
  - Acrylic baked enamel (ACRA-BOND® ULTRA)** by AkzoNobel baked on at 350°F, 0.8 to 1.2 mils dry Meets AAMA-2603 Standards
  - Kynar® (ALUM\*A\*STAR®)** 2 coats by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry Meets AAMA-2605-05 Standards
  - Kynar 500® or HYLAR® 5000 70% TRINAR®** (2 coats) by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry, Meets AAMA-2605-05 Standards
  - Kynar 500® or HYLAR® 5000 (70% Tri-Escent II)** (2 coats) by AkzoNobel, a superior finish to other metallic or anodized finishes. A blend of mica, ceramic, and inorganic pigments creates subtle yet dazzling design that goes beyond metallic color without the requirement of a clear coat. 14 standard colors - custom colors available. Baked on at 415°F, 1.4 to 1.8 mils dry, meets AAMA 2605-05.
  - Clear Anodize Match** (paint meets AAMA 611)
  - Integral Color Anodize Match** (paint meets AAMA 611)
- Clear coat available for all above finishes.
  - Hylar® 5000 is a registered trademark of Solvay Solexis, Inc.
  - Kynar® 500 is a registered trademark of Arkema.
  - ALUM\*A\*STAR® 50 and TRINAR® are registered trademarks of AkzoNobel
  - ACRA-BOND® ULTRA is a registered trademark of AkzoNobel

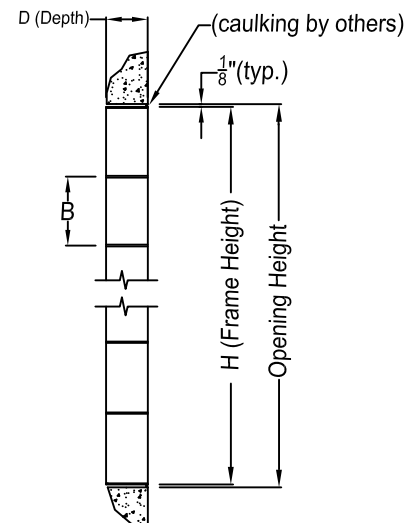


**VERTICAL SECTION**

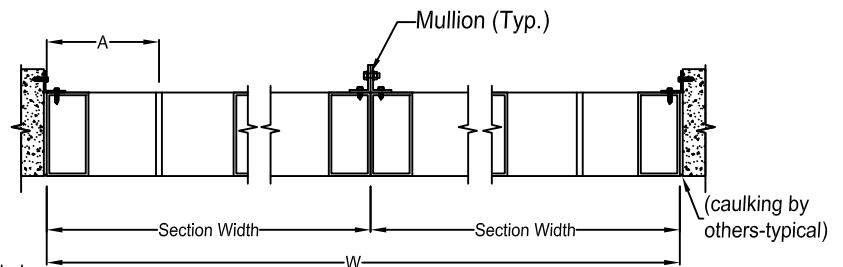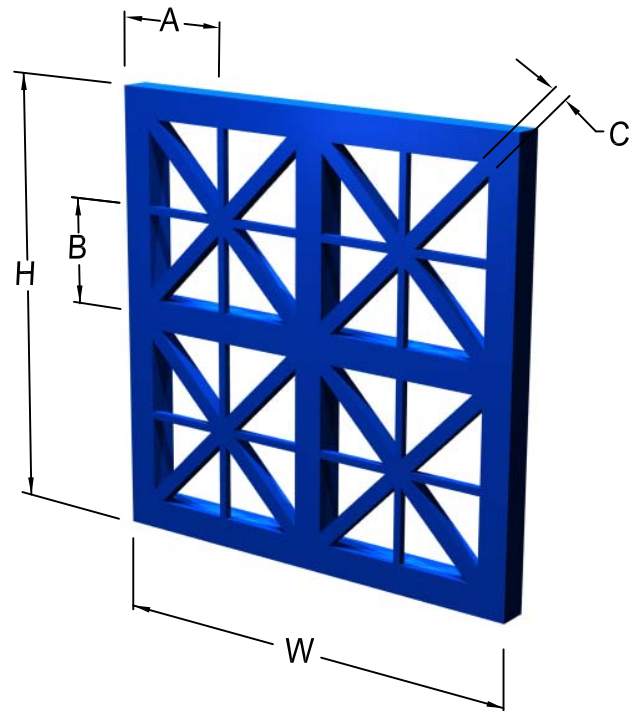

**HORIZONTAL MULTI-SECTION**

Due to continuing research, United Enertech reserves the right to change specifications without notice.

OVERALL SCREEN DIMENSIONS			INDIVIDUAL GRID DIMENSIONS		
(W)	(H)	(D)	(A)	(B)	(C)



**United Enertech**

3005 South Hickory Street  
Chattanooga, Tennessee 37407  
Tel: (423) 698-7715  
Fax: (423) 698-6629  
www.unitedenertech.com

---

**SERIES: DIAMOND-TEX SCREEN**

DRAWN BY: MHM	DATE: 5-18-10	REV. DATE: 1-11-13	REV. NO. 2	APPROVED BY: BGT	DWG. NO.: <b>D-9</b>
------------------	------------------	-----------------------	---------------	---------------------	-------------------------