(ENGINEERS)

SUBMITTAL DATA

Equipment Support

Model: UES-2

Equipment Support

Additional Options:

1.
2.
3.
4.

Standard Construction:

18 ga. Galvanized steel shell and baseplate; 8" minimum height,
2 x 4 pressure treated wood nailer (std.); C-channel bulkheads as required;
Fully welded one piece construction, 20 ga galvanized counterflashing
All welds prime painted after fabrication.

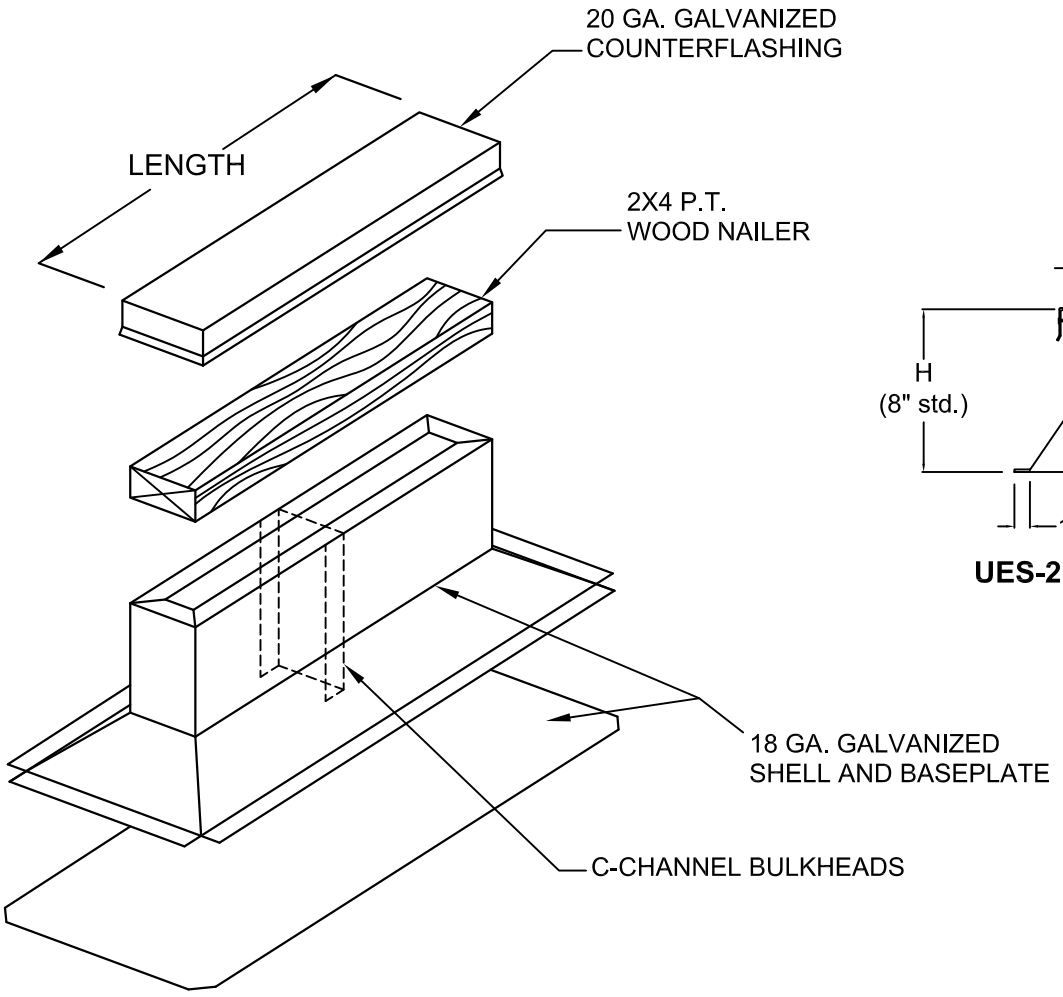

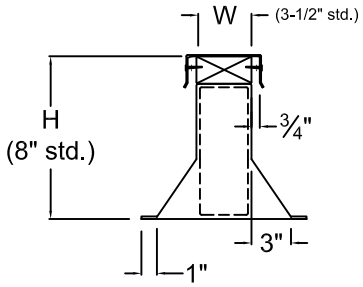

UES-2 SECTION

Due to continuing research, United Enertech reserves the right to change specifications without notice.

Qty.	LENGTH	H	W	Roof Slope	Tag- Description

DRAWN BY:	DATE:	REV. NO.	REV. DATE:	APPROVED BY:	DWG. NO.:
CLJ	8-25-06	4	1-4-11	CBY	M-6